

Technical Data Sheet

Megaprene 40GG

Gun Grade moisture curing polyurethane construction sealant

Description:

Adheseal MEGAPRENE 40GG is a single-component gun-grade moisture-curing polyurethane construction sealant/adhesive, designed for movement and connection joints on indoor and outdoor sealing applications.

Megaprene 40GG is tough, durable and has excellent chemical resistance. Resistant to intermittent fuel spills.

With its high elasticity, MEGAPRENE 40GG can accommodate up to $\pm 25\%$ of the original joint width. It is particularly easy to apply and smooth, curing to form a permanently elastic and dustproof joint seal between different elements in the construction, mechanical engineering, shipbuilding, vehicular, manufacturing, etc industries.

Uses:

- Perimeter sealing of windows
- Sealing Curtain Walls
- Expansion joints in precast / tilt-up panels
- Metal cladding & Bolted lap joints
- Pavement joints, car parks, driveways
- General construction sealant/adhesive
- Adheres to the most common construction materials: metal, wood, and concrete
- Floor mouldings and skirting boards
- Acoustic ceiling tiles
- Seam sealing
- Aluminium fabrication
- Skirting boards
- Sealing materials with different thermal exposure coefficients
- Fibreglass
- Vehicular and marine manufacturing.



Benefits:

- Fast curing (FC)
- Paintable with acrylic, oil, and rubber-based paints (confirm adhesion; non-flexible paints may crack)
- Excellent adhesion to most common building materials, including powder coat (preliminary tests suggested)
- Once cured, suitable for below-waterline applications.
- Resistant to intermittent fuel spills.
- Proven long-term durability and resilience
- Ready to use – single pack, user-friendly
- Non-toxic, low VOC, meets “green star” environmental criteria
- Inhibits mould and biological growth
- High permanent flexibility
- Suitable for internal & external applications
- Resists mould & mildew in hot and humid environments
- Joint movement capabilities $\pm 25\%$
- Maintains a waterproof, flexible joint
- Low odour
- Noncorrosive to most surfaces, including galvanized/zinc-coated steel and concrete.

Adheseal: Megaprene 40GG - TDS

Acceptable Substrates:

- Masonry, Brick, Stone, Porcelain
- Metal, Aluminium (except lead & copper)
- Timber
- Plastics
- Painted surfaces
- Rubber
- Fibreglass
- Powder coat
- Waterproof membranes.

Before use a preliminary adhesion test is suggested.

For a more comprehensive list see Primer Selection Chart.

Limitations:

Adheseal MEGAPRENE 40GG is NOT suitable for use in the following applications:

- Totally confined spaces; as the sealant requires atmospheric humidity to cure, it will not cure where it does not have access to atmospheric humidity
- Aquariums
- Not suitable for internal swimming pool applications. Avoid exposure to high levels of chlorine. (Maximum level is 5ppm).
- Adhering mirrors (Hi-Power/MS609 can be used - test first)
- Structural glazing (N-80 or N-60 glazing silicone)
- All stone (we recommend the completion of a stain testing program before using any sealant on stone) - S100 is recommended for marble, granite (after stain test)
- Sealant may discolour copper & brass
- Do not expose the sealant to materials containing cleaning agents, solvents and alcohol that may affect or discolour the sealant, particularly during product curing.
- Not to be used on bituminous, natural rubber, EPDM rubber surfaces or in conjunction with any compound that might leach oils, plasticisers or solvents.
- Avoid applying when moisture-vapour-transmission is emanating from the substrate, and if air-entrapment can occur, as this may cause bubbling.

Application:

Surface preparation:

All surfaces must be structurally sound, stable, dry, clean, and free of dust, loose, flaking, friable material and free from oils, grease, form release agents, curing compounds, and any other surface contamination that may hinder adhesion. Substrate must be free from surface water and continual dampness. Concrete must be allowed to cure for at least 28 days. Failure to do so may result in poor adhesion and subsequent delamination. Use the two-wipe process for impervious substrates. Ensure the cloths are clean and changed frequently and use a suitable cleaner/solvent such as Xylene. To achieve a neater finish and to avoid getting sealant on the adjoining surfaces, mask joint edges with tape.

Priming: Due to the high bond strength of Adheseal sealants, adhesion is normally achieved without priming on most substrates. However, for optimal adhesion and critical high-performance applications and highly stressed joints, if priming or surface preparation is being considered, review the following.

Non-porous substrates:

Aluminium, waterproof membranes, anodised aluminium, stainless steel, PVC, galvanized steel, powder-coated metals or glazed tiles: slightly roughen the surface with a fine abrasive pad. Clean and pre-treat using Adheseal 50A surface prep applied with a clean cloth. Once primed, allow no less than 30 minutes and no longer than 2 hours before applying the sealant/adhesive. For metals such as copper, brass and titanium-zinc and plastics such as PVC, an adhesion test is advised.

Porous substrates:

Concrete, aerated concrete and cement-based renders, mortars and bricks: prime surface using Everflex Supaprime applied by brush. Once primed, allow no less than 30 minutes and no longer than 2 hours before applying the sealant/adhesive. For more detailed advice and instructions, contact Adheseal Technical Services. Note: primers are adhesion promoters and not an alternative to improve poor preparation/cleaning of joint surfaces.

Primers also improve the long-term adhesion performance of the sealed joint. Avoid excessive application of primer as this can cause puddles at the base of the joint.

Test for adhesion is always recommended; also, refer to the Adheseal Primer Selection Chart.

Adheseal: Megaprene 40GG - TDS

Sealant joint design:

Where possible, the sealant should be at a 2:1 ratio (width:depth). For internal joints, the width and the depth of the joint should be a minimum 5mm, and for external joints, 12mm. For joints greater than 10mm deep, a backing rod should be used. Use an open-cell foam-backing rod 25% larger than the joint width to control the depth of the joint sealant. The sealant should only be fixed to two surfaces to allow movement. Hence, on flat joints, use a polyethylene tape or release agent to prevent 3-sided adhesion.

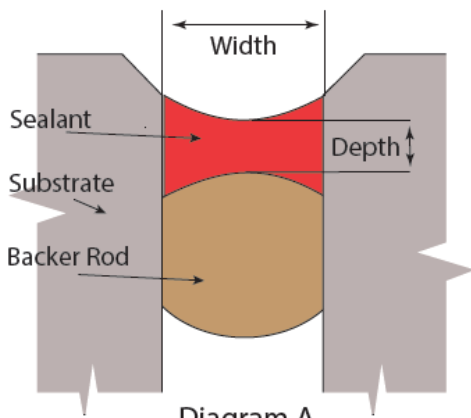


Diagram A

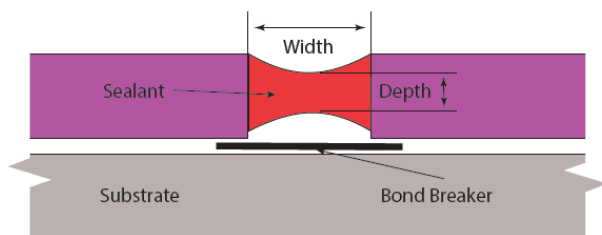


Diagram B

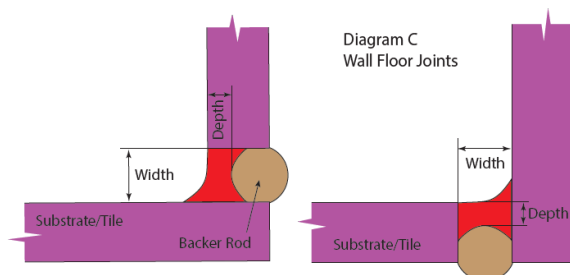


Diagram C
Wall Floor Joints

Width	Depth
5-10mm	As the width min 5mm
10mm	5-8mm
15mm	7-10mm
20mm	10mm
25mm	12mm

Installation:

Where required, use Adhefoam open cell backer rod. Closed-cell backer rod is also suitable, but care must be taken not to damage the outer skin of the rod as this can cause gassing (bubbles) in the sealant. When the depth of the joint does not allow for backer rod a bond breaker tape is required to prevent three-sided adhesion.

Apply at a temperature between 5°C and 40 °C.

To apply MEGAPRENE 40GG as a sealant: cut nozzle at 45° angle to desired thickness. Cut an opening in the sausage. Insert the sausage and nozzle into the sausage gun. Hold the gun at a 45° angle with the nozzle in contact with both sides of the joint. Apply by pushing sealant ahead of the nozzle, thus ensuring sealant is pushed firmly into place, in a steady, continuous bead, ensuring good contact with both sides of the joint to achieve the required adhesion. Fill the prepared joint completely, taking care not to entrap air (entrapped air may cause bubbles in the sealant).

To apply MEGAPRENE 40GG as an adhesive: cut the nozzle at a 90° angle to the width of the desired bead, then cut a wedge in the nozzle twice the height as the width of the bead. Cut an opening in the sausage. Insert the sausage and nozzle into the sausage gun. Hold the gun at a 90° angle with the nozzle flat on the surface. Dispense the sealant following the nozzle, thus ensuring the sealant is standing in place, in a steady, continuous triangular bead. Bring the two surfaces together, compressing the triangular bead to no less than 2mm, ensuring good contact with both sides of the joint to achieve the required adhesion. Diagram D

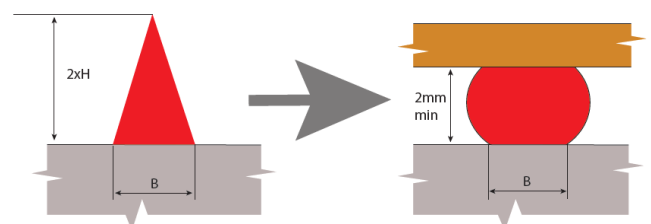


Diagram D

Tool off with a moistened spatula to finish the joint smoothly before the skin forms, approximately 15 minutes. While the sealant is still wet, clean off any excess. If joint edges have been masked, remove tape whilst the sealant is still wet. If the sealant has dried on the surface, clean with white spirit solvent to soften the sealant, then scrape off with a blade. The incompatibility of some substrates may cause discolouration of the sealant, poor sealant adhesion or long-term degradation of the sealant. Always carry out

Adheseal: Megaprene 40GG - TDS

compatibility tests where contact with potentially incompatible materials may occur.

Tool off with a moistened spatula to finish the joint smoothly before the skin forms, approximately 5 minutes. While the sealant is still wet, clean off any excess. If joint edges have been masked, remove tape whilst the sealant is still wet.

If the sealant has dried on the surface, clean with solvent to soften it, then scrape off with a blade. The incompatibility of some substrates may cause discolouration of the sealant, poor sealant adhesion or long-term degradation of the sealant. Always carry out compatibility tests where contact with potentially incompatible materials occurs.

Masking: It is recommended to use masking tape where neat or exact joint lines are required. Remove the tape from the skin immediately after finishing.

Coverage:

Coverage will vary according to joint width and depth, as well as the type and method of application. The figures below can be used as a guide for:

Adheseal Sealant Calculator				
Joint Size mm	M per ctg	M Per ssg	M per Lt	
6 X 6	8.3	16.7	27.78	
10 X 6	5.0	10.0	16.67	
10 X 10	3.0	6.0	10.00	
12 X 12	2.1	4.2	6.94	
15 X 8	2.5	5.0	8.33	
15 X 15	1.3	2.7	4.44	
20 X 10	1.5	3.0	5.00	
20 X 20	0.8	1.5	2.50	
25 X 12	1.0	2.0	3.33	

Triangular Joint Beads	
Joint Size mm Width x Height	Lm Per Sausage
5x5mm	50
10x10mm	12
10x15mm	6
10x20mm	3

Cure Time:

Allow approximately 10 minutes skin time, cure time 3mm per day at 25 °C & 50% humidity. Please note that all cure times vary depending on atmospheric conditions and porosity of the substrate.

Physical Properties

Type of product	Polyurethane
Curing system	Moisture
Cure Time	3mm / 24Hours
Density (specific gravity)	Black:1.15. Others 1.16±0.02
Shore A Hardness	25 after 14 days
Joint Movement Capability	+/- 25%
Tear Strength (ISO 34)	6.5N/mm
Elongation to break ISO 8339	>400%
Modulus Elongation ISO 8339	0.4 MPa @ 100%
Application temperature	+5°C to +35°C
Service Temp	-40°C to +80°C
Working Time	25m @ 23°C & 50% RH
Skinning Time	60m @ 23°C & 50% RH
VOC	2010/75/UE ISOLEMFI 50134C Mono <1.5g/l
Shelf life	18 months in original packaging
Storage: Cool Dry between	10°C and 35°C
UV Resistance 500h	Good
Chemical Resistance	Excellent for water, detergent solutions, moderately diluted acids & alkalis, petrol & oil for short periods.
Sealant Classification as per ISO 11600	Type F Class 25 LM
Accelerated testing for UV & Weathering Tested beyond ASTM C793-05, ISO11431 & ISO EN 14187-8	No chalking, no cracks or yellowing
AS1530.3 Test report 23-000124 AWTA	Ignitability Index 0. Spread of Flame Index 0 Heat Evolved Index 0 Smoke Developed Index 0-1
VOC European 2004/42/CE	95 gm/lt
Colour's	Black & Grey
Packaging	600ml foil sausages

Adheseal: Megaprene 40GG - TDS

Clean Up:

While the product is still wet, tools and spills can be cleaned with Xylene. The cured product can be removed by mechanical means.

For cleaning skin, use Adheseal Hand Wipes.

Packaging:

600 ml Foil Sausage, in cartons of 20.

Colours:

Concrete Grey (7047) MEGA40CGR/SSG

Black (9011) MEGA40BLK/SSG

Number in brackets indicates closest RAL colour.



Packaging:

600ml Sausage

Note: Before application, refer to all relevant TDS's and SDS's detailed product specifications & application instructions.

Specification: The information contained in this TDS is typical but does not constitute a full specification, as conditions and specific requirements may vary from project to project. The instructions should be considered as a minimum requirement. The applicator or contractor must use their skill, knowledge, and experience to carry out additional works as may be necessary to meet the requirements of the project. Specifications for specific projects should be sought from the company in writing.

Conditions Of Use and Disclaimer:

The information contained in this TDS is given in good faith based upon our current knowledge and does not imply warranty, express or implied. The information is provided, and the product is sold on the basis that the product is used for its intended purpose and is used in a proper workman-like manner in accordance with the instructions of the TDS in suitable and safe working conditions. Under no circumstances will the Company be liable for loss, consequential or otherwise, arising from the use of the product.

Health and Safety:

If poisoning occurs, contact a doctor or Poisons Information Centre (Phone Australia 131 126, New Zealand 0800 764 766).

Inhalation: Supply fresh air. If required, provide artificial respiration. Keep patient warm. Consult doctor if symptoms persist. In case of unconsciousness, place patient stably inside position for transportation
Skin Contact: Immediately wash with water and soap and rinse thoroughly.

Eye contact: Rinse opened eye for several minutes under running water. Then consult a doctor.

Ingestion: If swallowed, do not induce vomiting. Seek medical advice.

PPE for First Aiders: Wear gloves, apron, safety glasses, respirator. Use with adequate ventilation. If inhalation risk exists wear organic vapour/particulate respirator meeting the requirements of AS/NZS 1715 and AS/NZS 1716. Available information suggests that gloves made from Nitrile Rubber should be suitable for intermittent contact. However, due to variations in glove construction and local conditions, the user should make a final assessment. Always wash hands before smoking, eating, drinking or using the toilet. Wash contaminated clothing and other protective equipment before storing or re-using.

Notes to physician: Treat symptomatically. Effects may be delayed. Treat symptomatically

DANGER



Brisbane North 26 Wolverhampton St, Stafford QLD 4053
Brisbane South 8 Moss St, Slacks Creek QLD 4127
Sunshine Coast 18 Kessling Ave, Kunda Park QLD 4556
Gold Coast 12 Distribution AV Molendinar QLD 4214

PH (07) 3356 0000 Email sales@adheseal.com.au
PH (07) 3111 6666 Email slacks@adheseal.com.au
PH (07) 5477 0022 Email sc@adheseal.com.au
PH (07) 5681 1111 Email gc@adheseal.com.au

www.adheseal.com.au