



PVC WATERPROOFING ANGLE

Product Description:

The PVC Waterproofing Angle range is available in 3 different sizes. Waterproofing Angle is primarily used as a barrier for Waterproofing edges.

The standard supply colour for the PVC Waterproofing Angle is White.

Technical Details:


The PVC Waterproofing Angle is manufactured from un-plasticised PVC, which allows it to withstand higher temperature resistance as well as having stronger structural stability.

Hardness	High
Tensile Strength:	High
UV Resistance:	Excellent
Westher Resistance:	Excellent
Heat Resistance:	Up to 100 C

*** High Hardness allows for suitability in Structural application.*

Having no plasticisers also offers environmental friendliness.

Length	3.00 metres
---------------	-------------

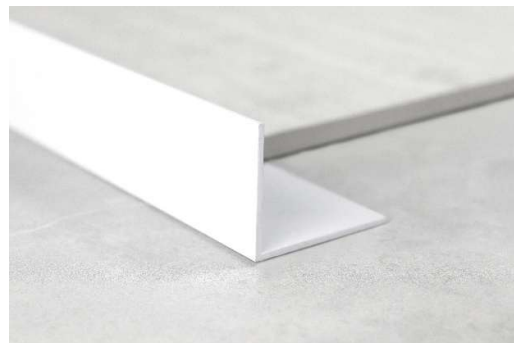


Installation and Maintenance:

PVC Waterproofing Angle is installed by simply determining the length required and cutting to size. It is best cut with specific PVC cutting shears, although can be cut by hacksaw or an electric drop saw with a suitable cutting blade.

The PVC Waterproofing Angle should be wiped clean during installation.

External Use:

PVC Waterproofing Angle can be used externally, although its intended application is for indoor use.

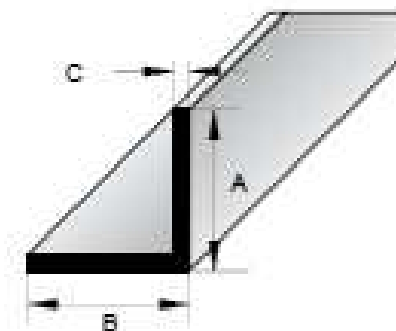

PVC Waterproofing Angle 3m Length			
Code	A (mm)	B (mm)	C (mm)
PVC-WPA40502-3	40.00	50.00	2.00
PVC-WPA755014-3	75.00	50.00	1.40
PVC-WPA45454-3	45.00	45.00	4.00